
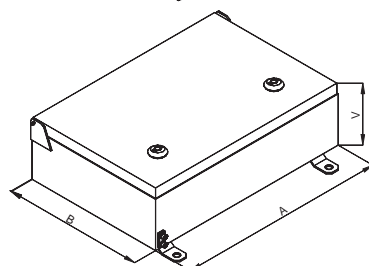


XN



XN p

PRÁZDNÉ NEREZOVÉ SKŘÍŇE TYP XN

Provedení:	⊕ I M2/II 2GD Ex e tD I/II IP 66
	Schváleno dle ATEX jako Ex součást
Rozsah pracovních teplot:	s těsněním SILIKON-ACETÁT: -60°C – + 115 °C
	s těsněním SILIKON: -60°C – + 115°C
	s těsněním POLYURETAN: -40°C – + 70°C

Objednací číslo	rozměry [mm]			Počet šroubů
	A	B	V	
XN 15 15 09	150	150	90	4
XN 20 15 09	200	150	90	4
XN 20 20 09	200	200	90	4
XN 30 15 09	300	150	90	4
XN 30 20 09	300	200	90	4
XN 30 30 09	300	300	90	4
XN 30 40 09	300	400	90	4
XN 40 20 09	400	200	90	4
XN 40 30 09	400	300	90	4
XN 40 40 09	400	400	90	4
XN 40 56 09	400	560	90	6
XN 56 40 09	560	400	90	6

XN 30 20 15	300	200	150	4
XN 30 30 15	300	300	150	4
XN 30 40 15	300	400	150	4
XN 33 20 15	330	200	150	4
XN 33 30 15	330	300	150	4
XN 36 20 15	360	200	150	4
XN 36 30 15	360	300	150	4
XN 40 20 15	400	200	150	4
XN 40 30 15	400	300	150	4
XN 40 40 15	400	400	150	4
XN 40 56 15	400	560	150	4
XN 50 30 15	500	300	150	4
XN 50 40 15	500	400	150	4
XN 56 40 15	560	400	150	6

XN 30 40 19	300	400	190	4
XN 33 20 19	330	200	190	4
XN 33 30 19	330	300	190	4
XN 36 20 19	360	200	190	4
XN 36 30 19	360	300	190	4
XN 40 30 19	400	300	190	4
XN 40 40 19	400	400	190	4
XN 40 56 19	400	560	190	4
XN 40 80 19	400	800	190	4
XN 50 30 19	500	300	190	4
XN 50 40 19	500	400	190	6
XN 80 40 19	800	400	190	6

Objednací číslo	rozměry [mm]			Počet zámků
	A	B	V	
XN 15 15 09p	150	150	90	1
XN 20 15 09p	200	150	90	1
XN 20 20 09p	200	200	90	1
XN 30 15 09p	300	150	90	1
XN 30 20 09p	300	200	90	1
XN 30 30 09p	300	300	90	1
XN 30 40 09p	300	400	90	1
XN 40 20 09p	400	200	90	1
XN 40 30 09p	400	300	90	1
XN 40 40 09p	400	400	90	1
XN 40 56 09p	400	560	90	2
XN 56 40 09p	560	400	90	1

XN 30 20 15p	300	200	150	1
XN 30 30 15p	300	300	150	1
XN 30 40 15p	300	400	150	1
XN 33 20 15p	330	200	150	1
XN 33 30 15p	330	300	150	1
XN 36 20 15p	360	200	150	1
XN 36 30 15p	360	300	150	1
XN 40 20 15p	400	200	150	1
XN 40 30 15p	400	300	150	2
XN 40 40 15p	400	400	150	1
XN 40 56 15p	400	560	150	2
XN 50 30 15p	500	300	150	2
XN 50 40 15p	500	400	150	1
XN 56 40 15p	560	400	150	1

XN 30 40 19p	300	400	190	1
XN 33 20 19p	330	200	190	1
XN 33 30 19p	330	300	190	1
XN 36 20 19p	360	200	190	1
XN 36 30 19p	360	300	190	1
XN 40 30 19p	400	300	190	1
XN 40 40 19p	400	400	190	1
XN 40 56 19p	400	560	190	2
XN 40 80 19p	400	800	190	1*
XN 50 30 19p	500	300	190	1
XN 50 40 19p	500	400	190	2
XN 80 40 19p	800	400	190	1*

Poznámka:

- * Použit rozvorový typ zámků
- ** U skříní typu XN80....(p) a XN..80..(p) jsou pro upevňovací pasy použity 4 šrouby M8 dle DIN 912, které jsou zašroubovány do navařených matic s neprůchozím závitem M8.

Další varianty na objednávku.

Podrobné technické údaje k typu XN.. na požádání – e-mail: obchod@generi.cz.