




## POLYESTROVÉ SKŘÍNĚ XP

Provedení	II 2G Ex eb IIC Gb II 2D Ex tb IIIC Db
Stupeň krytí	IP66
Provozní teplota	-40 °C až +105 °C
Materiál	polyester vyztužený skelnými vlákny (GRP), povrchový odpor <math> < 10^9 \Omega </math>
Barva	černá, RAL 9005

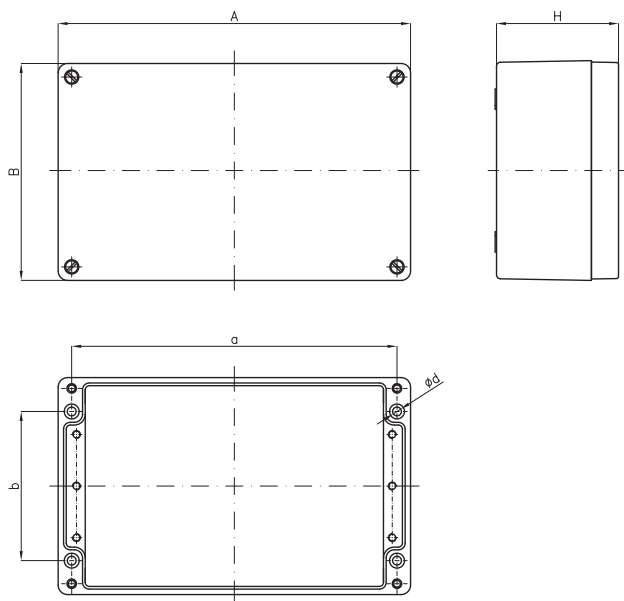

Objednací číslo	Rozměry [mm]						Hmotnost [kg]
	A	B	H	a	b	Ød	
XP 080806	80	75	55	68	45	5,0	0,23
XP 080808	80	75	75	68	45	5,0	0,25
XP 110806	110	75	55	98	45	5,0	0,30
XP 160806	160	75	55	148	45	5,0	0,41
XP 190806	190	75	55	178	45	5,0	0,45
XP 121209	122	120	90	106	82	6,6	0,75
XP 221209	220	120	90	204	82	6,6	1,06
XP 161609	160	160	90	140	110	6,6	1,13
XP 261609	260	160	90	240	110	6,6	1,71
XP 361609	360	160	90	340	110	6,6	2,29
XP 561609	560	160	90	540	110	6,6	3,32
XP 202512	200	250	120	180	200	6,6	2,25
XP 252512	255	250	120	235	200	6,6	2,65
XP 252516	255	250	160	235	200	6,6	3,15
XP 402512	400	250	120	380	200	6,6	3,65
XP 402516	400	250	160	380	200	6,6	4,25
XP 404012	400	405	120	380	355	6,6	5,58
XP 602512	600	250	120	580	200	6,6	5,24
XP 602516	600	250	160	580	200	6,6	5,94