

CONTROL HEADS XMB, XPB, XSV, XRP	
Type of protection	ⓧ I M2 Ex eb I Mb ⓧ II 2G Ex eb IIC Gb ⓧ II 2D Ex tb IIIC Db
Ingress protection	IP 67
Operating temperature	0 °C to +85 °C (I M2) -60 °C to +85 °C (II 2G, II 2D)
Material	zinc casting, galvanized with zinc
Mounting	through a hole ø22.5, wall thickness 1 – 9 mm


CONTACT ELEMENTS NO / NC	
Type of protection	ⓧ II 2G Ex db eb IIC Gb
Ingress protection	IP 20
Operating temperature	-50 °C to +75 °C
Rated voltage and current	415 V, 10 A
Switching capacity	AC15: 240 V / 3 A DC13: 250 V / 0,27 A
Mounting	on head
Connection	screw terminals, 1× wire 0.5 – 2.5mm ²

XMB10-A – mushroom head pushbutton



Order code example:
XMB10-APP4R-0N0/2NC

XMB10-ANO/.NC

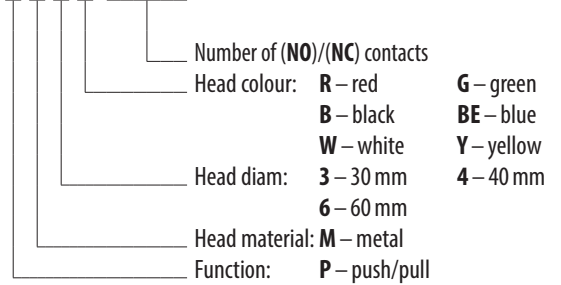


XPB10-A – spring return pushbutton



Order code example:
XPB10-AF3G-1N0/1NC

XPB10-A F 3 . . .NO/.NC

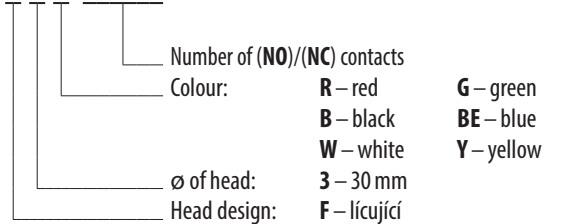


XSV10-A – cam switch



Order code example:
XSV10-AKF6 D6
Specify a switching table to the order number.

XSV10-A F

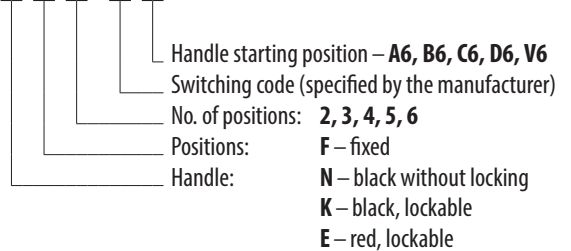

Contact	Position					
	1	2	3	4	5	6
13-14						
23-24						
33-34						
43-44						
53-54						
63-64						

D6

B6

A6

V6

C6