


THREADED BUSHINGS M...x.	
Type of protection (types K, V, O, P)	I M2 Ex db I Mb II 2G Ex db IIC Tx Gb
Type of protection (type S)	I M2 Ex db eb I Mb II 2G Ex db eb IIC Tx Gb
Operating temperature *	-60 °C to +115 °C
Casing thread	metric (tolerance class 6g)



* It is the maximum range of operating temperatures of all explosion-proof bushing types. The real range is given by the used type of wires or cables.

Type **K - COAXIAL** (with coaxial cables)

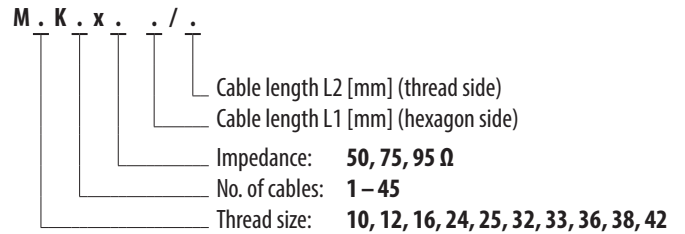


Order number example: M24K2×50 200/200

Type **V - WIRE** (with stranded wires)

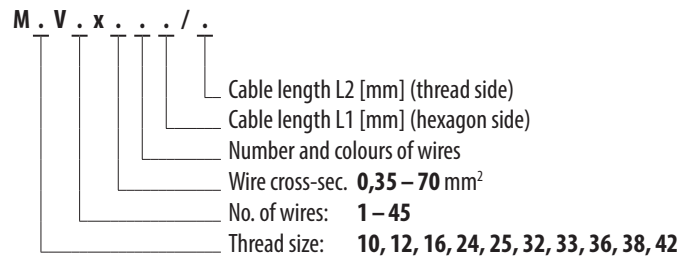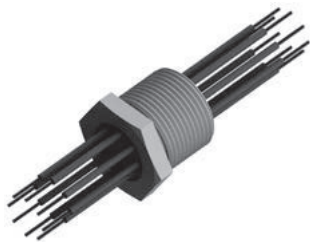



Order number example: M36V7×2,5 4bk+3bu 300/500

Type **O - OPTICAL** (with optical cables)

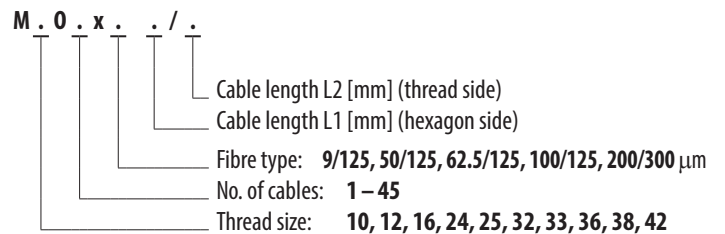


Order number example: M36O2×9/125 150/300

Type **P – RIBBON** (with ribbon wire)

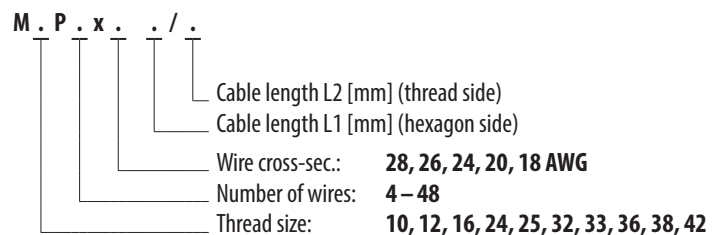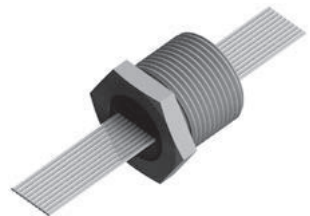

Order number example: M42P48×18 200/200

Type **S – STUD** (with a stud)

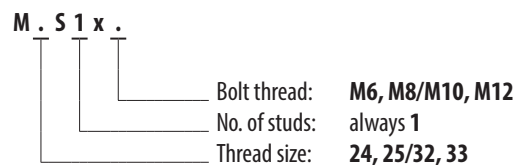

Order number example: M32S1×M12

A particular version of the bushing is given by the technical specification according to which we can design an optimum solution. For more information contact the technical service department – e-mail: obchod@generi.cz.