



STAINLESS STEEL BOXES TYPE X.X2, X.X2/JB		
Type of protection	type X.X2: Ⓢ II 2G Ex eb IIC T6 Gb Ⓢ II 2D Ex tb IIIC T85°C Db	type X.X2/JB: Ⓢ II 2G Ex ia IIC T6 Gb Ⓢ II 2D Ex ia IIIC T85°C Db
Ingress protection	IP 65	
Ambient temperature	-20 °C ≤ Ta ≤ +40 °C	
Rated voltage	750 V	Ui = 60 V
Rated loading	1,5 mm ² : 10 A; 2,5 mm ² : 13 A; 4 mm ² : 16 A	
Connection	screw terminals 2× 4 mm ²	
Cable entry	as required	
Dimensions (w × h × d)	see table	
Mounting holes / spacings	see table	

* Type and number of cable glands and plugs acc. to request.

Breather/drain valve included as standard (without affecting the number of cable entry openings).

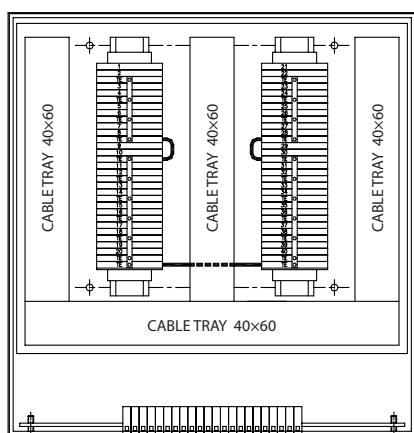

X341X2 DEP type1
X341X2/JB DEP type2

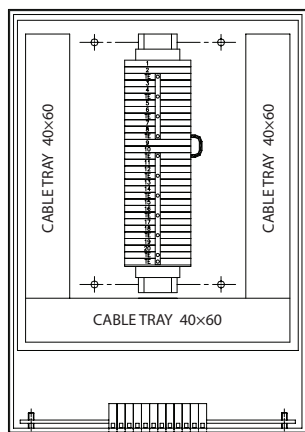

X340X2 DEP type3
X340X2/JB DEP type4

Terminals	Box dimension š × v × h [mm] (montážní rozměry)	Cable entry openings*	Weight	Order number
40 pcs 2× 4 mm ² grey 22 pcs 2× 4 mm ² grey (FE) 22 pcs 1× 4 mm ² g/y (PE)	400 × 400 × 190 (4× ø 9 / 420 × 350)	1× ø 25 mm 20× ø 20 mm	10,3 kg	X341X2 DEP type1
40 pcs 2× 4 mm ² blue 22 pcs 2× 4 mm ² grey (FE) 22 pcs 1× 4 mm ² g/y (PE)	400 × 400 × 190 (4× ø 9 / 420 × 350)	1× ø 25 mm 20× ø 20 mm	10,3 kg	X341X2/JB DEP type2
20 pcs 2× 4 mm ² grey 11 pcs 2× 4 mm ² grey (FE) 12 pcs 1× 4 mm ² g/y (PE)	300 × 400 × 190 (4× ø 9 / 320 × 350)	1× ø 25 mm 10× ø 20 mm	8,1 kg	X340X2 DEP type3
20 pcs 2× 4 mm ² blue 11 pcs 2× 4 mm ² grey (FE) 12 pcs 1× 4 mm ² g/y (PE)	300 × 400 × 190 (4× ø 9 / 320 × 350)	1× ø 25 mm 10× ø 20 mm	8,1 kg	X340X2/JB DEP type4

Other variants to order.

Detailed technical data on demand – e-mail: obchod@generi.cz.